

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 February 2002 (28.02.2002)


PCT

(10) International Publication Number  
**WO 02/16484 A2**

- (51) International Patent Classification<sup>7</sup>: **C08J 7/00** 63579 Freigericht (DE). **GRIMM, Helmut**; Stadtweg 27, 64291 Darmstadt (DE). **BUDKE, Elisabeth**; Kriemhildstrasse 5, 50354 Hurth (DE).
- (21) International Application Number: PCT/US01/26147
- (22) International Filing Date: 22 August 2001 (22.08.2001) (74) Agents: **PAPPAS, Peter, G. et al.**; Sutherland Asbill & Brennan LLP, 999 Peachtree Street NE, Atlanta, GA 30309-3996 (US).
- (25) Filing Language: English
- (26) Publication Language: English (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (30) Priority Data:  
09/645,639 24 August 2000 (24.08.2000) US
- (71) Applicant: **THE COCA-COLA COMPANY** [US/US]; One Coca-Cola Plaza NW, Atlanta, GA 30313 (US).
- (72) Inventors: **RULE, Mark**; 2003 Royal Court, Atlanta, GA 30341 (US). **SHI, Yu**; 2911 Bridle Creek Drive, Conyers, GA 30084 (US). **GEBELE, Thomas**; Dangelweg 17,
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: MULTILAYER POLYMERIC/INORGANIC OXIDE STRUCTURE WITH TOP COAT FOR ENHANCED GAS OR VAPOR BARRIER AND METHOD FOR MAKING SAME

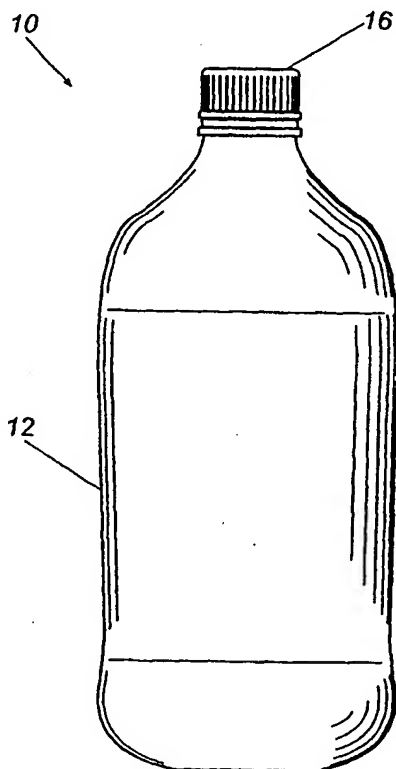

(57) Abstract: The coated multilayer structure comprising a polymeric base layer, an inorganic oxide gas barrier layer on a surface on the polymeric base layer, and a top coat on the inorganic oxide gas barrier layer, the top coat comprising a soluble compound capable of reducing the permeability of the multilayer structure to gas or vapor. A method for enhancing the gas or vapor barrier properties of a multilayer polymeric/inorganic oxide structure is also disclosed. According to one embodiment, SiOx coated polyethylene terephthalate containers are coated with a gas or vapor barrier enhancing top coat.

WO 02/16484 A2



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*

MULTILAYER POLYMERIC/INORGANIC OXIDE STRUCTURE  
WITH TOP COAT FOR ENHANCED GAS OR VAPOR BARRIER  
AND METHOD FOR MAKING SAME

5     Technical Field

      This invention relates to multilayer structures comprising a polymeric layer and an inorganic oxide gas or vapor barrier layer such as plastic containers coated with a inorganic oxide barrier layer. More particularly, this invention relates to plastic beverage containers and enhancing the gas or vapor barrier properties of the container. Still more  
10    particularly, this invention is particularly applicable to PET/SiOx structures, such as rigid PET containers that have been coated on the exterior with a thin SiOx layer.

      Background of the Invention

      Polymeric materials have numerous advantages as packaging materials for food  
15    and beverages. They are lightweight, impact resistant, and easily shaped. Accordingly, they have enjoyed widespread popularity. Unlike glass and metal, however, all polymers exhibit a measurable degree of permeability to gases and vapors. This deficiency inherently limits the use of polymers in more demanding applications, especially where oxygen ingress or carbon dioxide loss affects the quality of the contained food or  
20    beverage.

      Numerous technologies have been developed to decrease the permeability of polymers, and thus increase their range of applicability to food and beverage packaging. One of the most promising approaches has been the deposition of thin layers of inorganic oxides on the surface of the polymers, either prior to or after mechanically forming the  
25    polymer into the finished container. Inorganic oxides, especially silicon dioxide, have been explored extensively, because of their transparency, impermeability, chemical inertness, and compatibility with food and beverages.

      Inorganic oxides can be deposited onto a polymeric surface by a number of techniques, including sputtering and various types of vapor deposition including plasma  
30    vapor deposition, plasma enhanced chemical vapor deposition, and electron beam or anodic arc evaporative vapor deposition. Although each technique has its own

advantages and disadvantages, they all allow the deposition of nanometer-thick layers of the oxide onto the preformed polymer surface. Because of the thinness of the layer, the resulting structures retain most of the physical properties of the base polymer, but can exhibit reduced permeability.

5        Despite this, commercialization of containers based on polymeric/inorganic oxide multilayer structures has been slow, and is mostly limited to flexible containers made by post-forming coated films. In particular, rigid polymeric containers with inorganic oxide coatings have proven difficult to develop. This is because that, although the deposition of inorganic oxides onto the surface (especially the exterior surface) of a rigid container is  
10       not difficult to accomplish, heretofore those containers have not exhibited sufficient reductions in permeability over the uncoated containers. This is in spite of the fact that the inorganic oxide coating is typically deposited over the entire surface of the rigid container.

      The reason for this modest decrease in permeability (permeability decrease is  
15       equivalent to barrier increase) is due to the presence of residual pinholes in the inorganic oxide layer. Pinholes are created in part by pressurization of containers, such as when containers hold carbonated beverages. The surface area occupied by these pinholes is usually quite small (on the order of less than 1% of the total surface); however, the impact of these pinholes is far greater than their surface area would suggest. This is because  
20       diffusion through a polymer occurs in all three spatial dimensions; thus, each pinhole can drain a much larger effective area of the container surface than the actual area occupied by the pinhole.

      Because the surface of rigid containers is inherently less smooth than the surface of biaxially oriented films, the pinhole density on coated containers is much greater than  
25       that for films. Thus, whereas barrier improvements of 10-100x are possible when biaxially oriented PET film is coated with silicon dioxide; barrier improvements of only 2-3x have been obtained when rigid PET containers are similarly coated and used to hold carbonated beverages. This reduced barrier improvement is due in part to pressurization of the container. In addition, when the silicon oxide layer is on the external surface, it is  
30       subject to mechanical degradation on handling of the container, such as that which occurs in normal package filling operations.

Numerous methods have been explored to address this problem. The most common approach has been to deposit thicker layers of the oxide; however, this approach is inherently self-defeating. Thicker layers are less flexible and less extensible than thin layers, and therefore more prone to fracturing under stress. Another method is to apply multiple layers of inorganic oxides, sometimes with intermediate processing to redistribute the pinhole-causing species. This approach also has met with little success, in part because of the greater complexity of the process, and because of its modest impact on barrier improvement. A third method has been to supply an organic sub-layer on the polymer surface to planarize the surface and cover up the pinhole-causing species prior to laying down the inorganic oxide. This method also greatly increases the complexity and cost of the overall process, and similarly only affords modest improvements in barrier performance. A fourth approach has been to melt-extrude a second polymer layer on top of the inorganic oxide layer, and thus provide additional resistance to gas flow through the pinholes. Thus, Deak and Jackson (Society of Vacuum Coaters, 36<sup>th</sup> Annual Technical Conference Proceedings, 1993, p318) report that applying a 4 micron layer of poly(ethylene-co-vinyl acetate) on top of a PET/SiO<sub>x</sub> structure improved the barrier property by 3x, and applying a 23 micron top layer of PET improved the barrier performance by 7x.

Despite the barrier improvement demonstrated by Deak and Jackson, there has been little commercial implementation of this approach, for several reasons. First, melt extrusion of a second polymer onto a polymeric/inorganic oxide film imparts substantial thermal stress to the preformed structures, often severely compromising their barrier performance. Second, structures where the two polymers are different are inherently more difficult to recycle than structures composed only one polymer. Third, coextrusion of a second polymer onto preformed rigid containers is nearly impossible with current technology, and is cost prohibitive for large volume applications in the food and beverage industry.

Thus, there is a need for multilayer structures with enhanced barrier performance, especially polymeric/inorganic oxide multilayer structures such as silica coated PET containers.

### Summary of the Invention

This invention solves the above-described problems in the prior art by providing a coated multilayer structure comprising a polymeric base layer, an inorganic oxide gas barrier layer on the surface of the polymeric base layer, and a top coat on the inorganic oxide gas barrier layer comprising a soluble compound capable of reducing the permeability of the multilayer structure to gas or vapor. More particularly, the soluble compound has a plurality of carboxyl, hydroxyl, or carboxamide functional groups, has a melting point above room temperature (25 C), is chemically non-reactive with the inorganic barrier coating, is water soluble, and is nontoxic. The soluble compound of the top coat blocks ingress or egress of gas or vapor through the pinholes. The top coat is particularly suitable for blocking ingress or egress of oxygen and carbon dioxide.

This invention also encompasses a method for enhancing the gas or vapor barrier properties of a multilayer structure comprising a polymeric base layer and an inorganic oxide gas barrier layer on a surface of the polymeric base layer. This method comprises applying to the inorganic oxide gas barrier layer a top coat comprising the above-described soluble compound. Desirably, the soluble compound is applied to the inorganic oxide gas barrier layer in a form of a solution such as an aqueous solution. The multilayer structure is allowed to dry such that the solvent evaporates and the soluble compound remains as a top coat.

The soluble compound of the top coat can be polymeric or monomeric. Suitable polymeric compounds for the top coat include carboxymethyl cellulose, polyacrylamide, polydextrose, polyacrylic acid, and polyvinyl alcohol. Suitable monomeric compounds for the top coat include sucrose, caramel, and citric acid.

The treatment of this invention is particularly useful for enhancing the gas or vapor barrier characteristics of containers such as food or beverage containers. This invention is particularly useful for enhancing the gas or vapor barrier characteristics of packaged beverage containers such as carbonated soft drink containers. According to a particular embodiment, the top coat of this invention is applied to a silica-coated polyethylene terephthalate container.

Other objects, features and advantages of this invention will be apparent from the following detailed description of embodiments, claims, and drawings.

### Brief Description of Drawings

Fig. 1 is an elevation view of a packaged beverage including a container coated with a gas or vapor barrier top coat in accordance with an embodiment of this invention.

5 Fig. 2 is a partial sectional view of the container in Fig. 1 illustrating the multilayer structure of the container.

### Detailed Description of Embodiments

As summarized above, this invention encompasses multilayer structures  
10 comprising a polymeric base layer and an inorganic oxide gas barrier layer on a surface of the polymeric base layer, and a top coat on the inorganic oxide gas barrier layer for reducing the permeability of the multilayer structure to gas or vapor and thereby increasing barrier of the multilayer structure to gas or vapor. This invention also encompasses a method for reducing the permeability of such a multilayer structure to gas  
15 or vapor.

Polymeric-inorganic multilayer structures with enhanced gas or vapor barrier properties are particularly useful as food or beverage containers. It is often desirable that food or beverage containers prevent oxygen ingress or carbon dioxide egress. For example, polymer-inorganic oxide containers with enhanced vapor or gas barrier are  
20 desirable as packaged beverage containers and are particularly useful as carbonated beverage containers because they retain carbon dioxide better than containers without enhanced vapor or gas barrier.

Fig. 1 illustrates a packaged beverage 10 comprising a container body 12, a beverage (not shown) disposed in the container, and a closure or cap 16 sealing the beverage within the container body. Fig. 2 illustrates the multiple layers of the container  
25 body including the polymeric base layer 18, the inorganic oxide gas or vapor barrier layer 20 on the exterior surface 22 of the base layer, and a vapor or gas barrier enhancing top coat 24 on the inorganic oxide barrier layer. The top coat 24 illustrated in the Fig. 2 is continuous on the surface of the inorganic oxide barrier coating, but can be discontinuous.  
30 The top coat 24 is applied so as to enhances the vapor or gas barrier of the multilayer structure container 12.

Suitable polymers for forming the polymeric base layer 14 of the multilayer structure container 12 can be any thermoplastic polymer suitable for making containers. Polyesters are particularly suitable and polyethylene terephthalate (PET) is commonly used to form beverage containers. Other suitable polyesters include polyethylene naphthalate (PEN), PET/PEN blends, PET copolymers, and the like. Although this invention is applicable to flexible containers, it is most effective on substantially rigid containers.

The inorganic oxide barrier layer 20 reduces the permeability of the container 10 to gas and vapor, particularly carbon dioxide and oxygen. Silica (SiO<sub>x</sub>) is particularly desirable for beverage containers because it is transparent, chemically inert and compatible with food and beverages. The inorganic oxide barrier coating 20 can be applied to the polymeric base layer 14 by a number of techniques including sputtering and various types of vapor deposition including plasma vapor deposition, plasma enhanced chemical vapor deposition, and electron beam or anodic arc evaporative vapor deposition. Suitable vapor deposition techniques are disclosed in U.S. Patent Application Serial No. 09/380,904, filed on September 10, 1999, and corresponding to International PCT Application PCT/US98/05293, and U.S. Patent Application Serial No. 09/128,456, filed on August 3, 1998, and corresponding to International PCT Patent Application PCT/US99/15828, the disclosures of which are hereby expressly incorporated herein by reference. These inorganic oxide barrier layers often have pinholes which allow passage of gas and vapor.

The top coat 24 fills the pinholes 26 in the inorganic oxide gas barrier layer and reduces the permeability of the container 12 to gas or vapor. Suitable soluble compounds for forming the top coat are solid at temperature (25 C) and pressure (atmospheric pressure). Desirably, the top coat comprises a water soluble compound containing a large portion of hydroxyl groups, carboxamide groups or carboxylic acid groups for optimal barrier improvements. It is also desirable that the soluble compound for forming the top coat is non-toxic and chemically nonreactive with the inorganic oxide barrier layer.

The top coat can be applied by dissolving the soluble compound in water or another suitable solvent and applying the solution to the inorganic oxide barrier layer of the container by suitable means such as dipping or spraying. When the solvent



evaporates, the soluble compound remains in the pinholes of the inorganic oxide barrier layer to block ingress or egress of gas or vapor.

Although there are many solid/solvent combinations that are effective in the operation of this invention, it is preferred that both the solid and solvent be compatible with food and beverages. It is particularly preferred that both the solid and solvent have regulatory approval for use in food-contact. It is especially preferred to use water as the solvent, due to its low cost, non-toxicity, and ease of handling. There are many candidate solids, both polymeric and non-polymeric, that are water soluble, and that are acceptable for food contact. Examples of non-polymeric materials that can improve the barrier performance of polymeric/inorganic oxide structures include sucrose, caramel, and citric acid. Examples of suitable soluble polymeric materials for forming the top coat include carboxymethyl cellulose, poly(acrylamide), polydextrose, poly(acrylic acid), and poly(vinyl alcohol).

Higher concentrations of the soluble solid top coat compound normally afford greater barrier enhancement, but the barrier enhancement levels off eventually as concentrations of the soluble solid top coat compound increase. In contrast, higher molecular weight polymers are not more effective than low molecular weight compounds. Accordingly, it is preferable to employ a higher concentration of a low molecular weight compound, rather than a low concentration of a higher molecular weight compound.

The thickness of the top coat may vary and can be very thin. Some top coats can be applied at a thickness of 50 microns or less and some can be applied at a thickness of 10 microns or less. It should be understood, however, that the thickness of the top coat can be greater than 50 microns.

Specific embodiments of barrier-enhancing treatments of this invention include dipping SiOx-coated PET bottles into an aqueous sucrose solution followed by evaporation of the water, dipping SiOx-coated PET bottles into aqueous solutions of citric acid followed by evaporation of the water, or dipping SiOx-coated PET bottles into aqueous solutions containing poly-hydroxylated polymers. When similar operations are performed on PET that lacks a coating of SiOx, no barrier improvements are observed. It is notable that this effect can be reversible; thus, when a SiOx-coated PET bottle that has

been previously treated with a sucrose solution is immersed momentarily in pure water, the barrier enhancement disappears.

In some embodiments, application of the top coat to uncoated polymeric structures such as plastic bottles can enhance gas barrier of the polymeric structures. In direct application of the top coat to polymeric structures, better results are obtained if the uncoated polymeric structure is wettable with the top coat solution. Generally, however, the combination of an inorganic oxide barrier layer with a top coat provides much greater gas barrier.

An additional benefit of this invention is that, in addition to enhancement of the barrier properties of polymeric/inorganic oxide structures, it provides a method to increase the abuse resistance of such structures. Specifically, if film-forming polymeric materials are dissolved in the solution, deposition of those polymers onto the surface of the inorganic oxide layer can increase the abuse resistance of that layer. This is particularly useful in manufacturing packaged beverages because of the necessary mechanical handling of the treated containers.

In the manufacture of packaged beverages, the top coat of this invention can be applied to containers in a continuous packaged beverage manufacturing line between application of the inorganic oxide barrier layer to the container and filling the container with the beverage. Alternatively, the top coat can be applied to the containers after they are filled with beverage. Regardless, the containers treated in accordance with this invention can be used to manufacture packaged beverages in a conventional packaged beverage manufacturing facility.

#### EXAMPLES

In the following examples, SiOx-coated PET bottles were subjected to various treatments that demonstrate the barrier-enhancing effect of the present invention. These examples are intended to illustrate particular embodiments of this invention, but not limit the scope of this invention. In these examples, the CO<sub>2</sub> loss rate was measured by determining the rate that CO<sub>2</sub> migrated to the exterior of the bottle, when the bottles were pressurized to 5 bar pressure and held at 38 °C. The barrier improvement factor (BIF) was determined by measuring the loss rate for the barrier-coated bottles treated with a topcoat

vs. the loss rate for bottles without a barrier coat or a top coat. For example, the BIF of a plain, uncoated PET bottle is 1. Assuming the shelf life of a carbonated beverage packaged in a plain, uncoated PET bottle is about 10 weeks, the shelf life of a carbonated beverage in a coated PET bottle having a BIF of 1.2 would be about 12 weeks, the shelf  
5 life of a carbonated beverage in a coated PET bottle having a BIF of 2 would be about 20 weeks, and the shelf life of a carbonated beverage in a coated PET bottle having a BIF of 20 would be about 200 weeks.

#### Example 1

10 500 ml PET bottles produced by commercial stretch-blow molding were exterior-coated with a 50 nanometer layer of SiO<sub>x</sub>, using an anodic-arc plasma vapor deposition process. Before coating, the PET bottles exhibited a CO<sub>2</sub> loss rate of 2.7% per week (38 deg C, 5 bar pressure). After coating with SiO<sub>x</sub>, the same bottles exhibited a CO<sub>2</sub> loss rate of 1.1% per week. Thus, the coated bottles exhibited a barrier improvement factor  
15 (BIF) of 2.5 x over the uncoated PET bottles.

#### Example 2

The SiO<sub>x</sub>-coated PET bottles from Example 1 were dipped in a 5% sucrose/water solution for 30 seconds, then removed. The remaining water on the bottles was allowed to evaporate, and the CO<sub>2</sub> loss rate was again measured. The measured loss rate was  
20 0.54% per week, for a BIF of 5.0, and an enhancement over the untreated bottles of 2 x. Uncoated PET bottles treated under the same conditions had a CO<sub>2</sub> loss rate of 2.7% per week before and after treatment, showing that the treatment does not improve the barrier properties of PET without an inorganic oxide coating.

25

#### Example 3

The SiO<sub>x</sub>-coated bottles of Example 3 were dipped in clean tap water for 30 seconds, then were removed and allowed to air-dry. The CO<sub>2</sub> loss rate was again measured. The measured loss rate was 1.1% per week, the same as measured before  
30 exposing the bottles to the sugar solution.

## Example 4

SiOx-coated PET bottles exhibiting a BIF of 3.25 x (CO<sub>2</sub> loss rate of 0.86% per week) were dipped into a 5% aqueous solution of low molecular weight carboxymethyl cellulose, and allowed to air dry. The measured CO<sub>2</sub> loss rate was 0.32% per week, for a BIF of 8.79x and a barrier enhancement of 2.7x over the untreated bottles.

## Example 5

SiOx-coated PET bottles exhibiting a BIF of about 2.27 x (CO<sub>2</sub> loss rate of 1.19% per week) were tumbled for 1 minute and then dipped into a 5% aqueous solution of low molecular weight carboxymethyl cellulose for 30 seconds and allowed to air dry. The measured CO<sub>2</sub> loss rate was 0.52 % per week, for a BIF of 5.21x.

## Example 6

SiOx-coated PET bottles exhibiting a BIF about 2.27 x (CO<sub>2</sub> loss rate of 1.19% per week) were dipped into a 5% aqueous solution of low molecular weight carboxymethyl cellulose for 30 seconds and allowed to air dry and then tumbled for 1 minute. The measured CO<sub>2</sub> loss rate was 0.63% per week, for a BIF of 4.27x.

## Example 7

SiOx-coated PET bottles from Example 1 were dipped into a 1% aqueous solution of poly(acrylamide) and allowed to air dry. The barrier enhancement from this treatment was 1.2x. When this operation was repeated using a 5% aqueous solution of poly(acrylamide) the barrier enhancement obtained was 1.5x.

## Example 8

SiOx-coated PET bottles with a BIF of 1.66 were dipped into a 5% aqueous solution of 87% hydrolyzed poly(vinyl alcohol) and allowed to air dry. After this treatment the measured BIF was 2.59x. Thus, the measured barrier enhancement from this treatment was 1.56x.

## Example 9

SiOx-coated PET bottles with a BIF of 2.13 were dipped into a 5% aqueous solution of citric acid and allowed to air dry. After treatment, the BIF was 2.69. Thus, the barrier enhancement from this treatment was 1.26x.

5

## Example 10

SiOx-coated PET bottles with a BIF of 1.74 were dipped into a 5% aqueous solution of poly(acrylic acid) and allowed to air dry. The measured barrier BIF after this treatment was 3.30. Thus, the barrier enhancement from treatment with poly(acrylic acid) was 1.89x.

10

## Example 11

An SiOx-coated PET bottle with a BIF of 1.89 was dipped into 5% poly(acrylic acid) and allowed to air dry. The resulting BIF was 3.07. The bottle was then subjected to mechanical abuse by tumbling with other bottles for 60 seconds. After tumbling, the BIF was measured again and was found to be 2.56.

15

## Example 12

An SiOx-coated PET bottle with a BIF of 2.27 was dipped into a 5% carboxymethyl cellulose solution and allowed to air dry. The resulting BIF was 5.33. The bottle was then subjected to mechanical abuse by tumbling with other bottles for 60 seconds. After tumbling, the BIF was measured again and was found to be 4.57.

20

The following comparative examples illustrate water soluble and water-dispersible compounds and polymers that are not effective in increasing the barrier performance of SiOx-coated PET bottles. These examples illustrate the non-obviousness of the present invention with respect to the prior art, which teaches that any polymeric top-coat over a SiOx-PET multilayer will result in higher barrier.

25

#### Comparative Example 1

SiOx-coated PET bottles from Example 1 were dipped into an aqueous suspension of oxidized polyethylene wax and allowed to air dry. The measured CO<sub>2</sub> loss rate was 1.1% per week before the treatment, and remained unchanged after the treatment, even though a measurable layer of polyethylene had been deposited onto the surface of the bottle.

#### Comparative Example 2

SiOx-coated PET bottles were dipped into a 5% aqueous solution of benzoic acid and allowed to air dry. The measured BIF vs. uncoated reference bottles decreased from 2.02x to 1.3x, for a barrier decrease of 36%.

#### Comparative Example 3

SiOx-coated PET bottles were dipped into a 5% aqueous solution of poly(vinylpyrrolidone) and allowed to air dry. The resulting bottles showed a loss in BIF from 2.2x to 1.9x, or a loss of 14% in barrier.

#### Comparative Example 4

SiOx-coated PET bottles were dipped into a 5% suspension of Eastman AQ55 water dispersible polyester. Before treatment the bottles had a BIF of 1.80; after treatment the BIF was 1.42.

#### Comparative Example 5

SiOx-coated PET bottles with a BIF of 2.05 were dipped into a 5% aqueous solution of sodium bicarbonate, and were allowed to air dry. After this treatment the bottles had a BIF of 1.81.

#### Comparative Example 6

SiOx-coated PET bottles with a BIF of 1.80 were dipped into a 5% aqueous suspension of soluble starch, and were allowed to air dry. After this treatment the bottles had a BIF of 1.37.

**Comparative Example 7**

SiOx-coated PET bottles with a BIF of 2.04 were dipped into a 5% aqueous solution of poly(ethylene glycol) and were allowed to air dry. After this treatment the  
5 bottles had a BIF of 1.40.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in  
10 the art are intended to be included within the scope of the following claims.

We claim:

1. A coated multilayer structure comprising:  
a polymeric base layer;  
5 an inorganic oxide gas barrier layer on a surface of the polymeric base layer; and  
a top coat on the inorganic oxide gas barrier layer, the top coat comprising a soluble compound capable of reducing the permeability of the multilayer structure to gas or vapor.  
10
2. A coated multilayer structure as in claim 1 wherein the soluble compound has a carboxyl, hydroxyl, or carboxamide functional group.
3. A coated multilayer structure as in claim 1 wherein the soluble compound  
15 is in a solid state at a temperature of 25 °C and atmospheric pressure.
4. A coated multilayer structure as in claim 1 wherein the soluble compound is nonreactive with silica.
- 20 5. A coated multilayer structure as in claim 1 wherein the soluble compound is nontoxic.
6. A coated multilayer structure as in claim 1 wherein the soluble compound is polymeric.  
25
7. A coated multilayer structure as in claim 6 wherein the polymeric soluble compound is selected from the group consisting of carboxymethyl cellulose, poly(acrylamide), polydextrose, poly(acrylic acid), and poly(vinyl alcohol).
- 30 8. A coated multilayer structure as in claim 1 wherein the soluble compound is monomeric.



9. A coated multilayer structure as in claim 8 wherein the monomeric soluble compound is selected from the group consisting of sucrose, caramel, and citric acid.

5 10. A coated multilayer structure as in claim 1 wherein soluble compound is water soluble and is applied to the inorganic oxide gas barrier layer in an aqueous solution.

10 11. A coated multilayer structure as in claim 10 wherein the soluble compound, when in the aqueous solution, is in the form of molecules having a maximum dimension less than one micron.

12. A coated multilayer structure as in claim 1 wherein the inorganic oxide gas barrier layer has pinholes and the top coat is at least partially disposed in the pinholes.

15 13. A coated multilayer structure as in claim 1 wherein the inorganic oxide gas barrier layer is an SiO<sub>x</sub> coating.

14. A coated multilayer structure as in claim 1 wherein the inorganic oxide gas barrier layer is applied to the base layer with vapor deposition or sputtering.

15. A coated multilayer structure as in claim 1 wherein the base layer is a thermoplastic layer.

25 16. A coated multilayer structure as in claim 1 wherein the base layer is polyethylene terephthalate.

17. A coated multilayer structure as in claim 1 wherein the multilayer structure is a container.

30

18. A coated multilayer structure as in claim 17 wherein the multilayer structure is a container, the base layer forms a container body, and the gas barrier layer is on an exterior surface of the container body.

5 19. A packaged beverage comprising a container as in claim 17 and a beverage disposed in the container.

20. A packaged beverage as in claim 19 wherein the beverage is a carbonated beverage.

10

21. A method for reducing the permeability of vapor or gas through a multilayer structure comprising a polymeric base layer and an inorganic oxide gas barrier layer on a surface of the polymeric base layer, the method comprising applying to the inorganic oxide gas barrier layer a top coat comprising a soluble compound capable of  
15 reducing the permeability of the multilayer structure to gas or vapor.

22. A method as in claim 21 wherein the soluble compound has a carboxyl, hydroxyl, or carboxamide functional group.

20 23. A method as in claim 21 wherein the soluble compound is in a solid state at a temperature of 25 degrees C and atmospheric pressure.

24. A method as in claim 21 wherein the soluble compound is nonreactive with SiO<sub>x</sub>.

25

25. A method as in claim 21 wherein the soluble compound is nontoxic.

26. A method as in claim 21 wherein the soluble compound is polymeric.


27. A method as in claim 26 wherein the polymeric soluble compound is selected from the group consisting of carboxymethyl cellulose, poly(acrylamide), polydextrose, poly(acrylic acid), and poly(vinyl alcohol).
- 5 28. A method as in claim 21 wherein the soluble compound is monomeric.
29. A method as in claim 28 wherein the monomeric soluble compound is selected from the group consisting of sucrose, caramel, and citric acid.
- 10 30. A method as in claim 21 wherein the soluble compound is water soluble and the step of applying the soluble compound comprises applying the water soluble compound to the inorganic oxide gas barrier layer in an aqueous solution.
- 15 31. A method as in claim 30 wherein the soluble compound, when in the aqueous solution, is in the form of molecules having a maximum dimension less than one micron.
- 20 32. A method as in claim 21 wherein the inorganic oxide gas barrier layer has pinholes and the top coat is at least partially disposed in the pinholes.
33. A method as in claim 21 wherein the inorganic oxide gas barrier layer is an SiOx coating.
- 25 34. A method as in claim 21 wherein the inorganic oxide gas barrier layer is applied to the base layer with vapor deposition or sputtering.
35. A method as in claim 21 wherein the base layer is a thermoplastic layer.
- 30 36. A method as in claim 21 wherein the base layer is polyethylene terephthalate.

37. A method as in claim 21 wherein the multilayer structure is a container.


38. A method as in claim 37 wherein the multilayer structure is a container,  
the base layer forms a container body, and the gas barrier layer is applied to an exterior  
5 surface of the container body.

39. A method of packaging a beverage comprising:  
providing a container comprising a polymeric container body and an inorganic  
oxide gas barrier layer on an exterior surface of the container body;  
10 applying to the inorganic oxide gas barrier layer a top coat comprising a soluble  
compound capable of reducing the permeability of the container to gas or vapor; and  
depositing a beverage in the container.

40. A method as in claim 39 wherein the beverage is a carbonated beverage.  
15

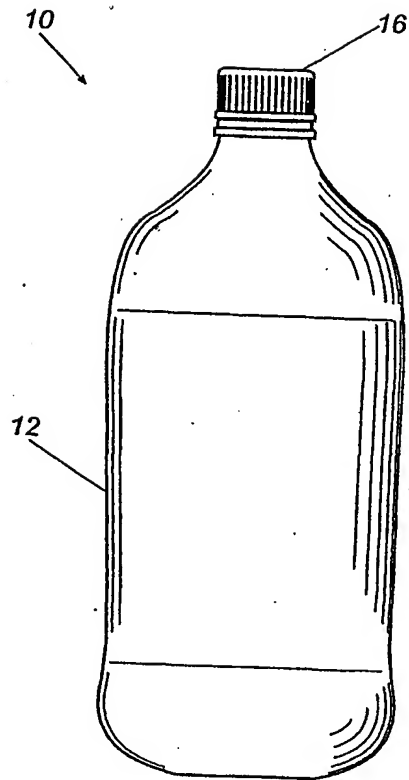

**Fig. 1**

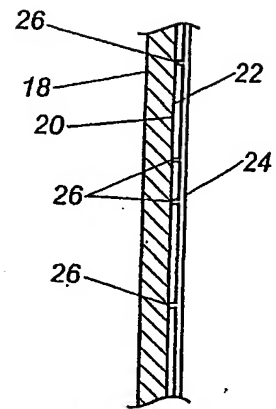

**Fig. 2**